

# PTV162.3000

TELESCOPIC CRANE PLATFORMS

## STANDARD FEATURES

### Performance


- 70000V Insulated Fiberglass Basket
- Automatic Basket Leveling
- Lighting on Basket
- Engine Start/Stop System (Vehicle dependent)
- Basket and Turret Control Panels
- Rotating Beacon on Turret
- All-terrain Outrigger Swivels
- Non-slip Body
- Toolbox (2 pieces)

### Safety

- TS-EN 280 + A1 / CE Conformity
- Emergency Bypass® System
- Emergency Stop Buttons on Control Panels
- Pressure Holding Valves and Interlocking Valves against hose blasts
- High Pressure Relief Valve
- Emergency Descend Hand Pump

## OPTIONAL FEATURES

- Electronic Card Controlled Proportional Joystick Controller
- Simultaneous Commands Execution (Full proportional)
- Electronic Load Scaling
- Automatic One-button Platform Leveling
- Tilt Sensor
- External AC Powerpack
- 110V/220V/380V Socket in Basket
- Aluminium Basket
- Steel Basket
- Extra Basket Capacity
- Toolbox in Basket
- Wireless Remote Joystick Controller
- Continuous Turret Rotation
- Operator Seat
- Operator Cabin
- Nonslip Aluminium Body
- Additional Toolboxes (+2)
- Additional Lighting

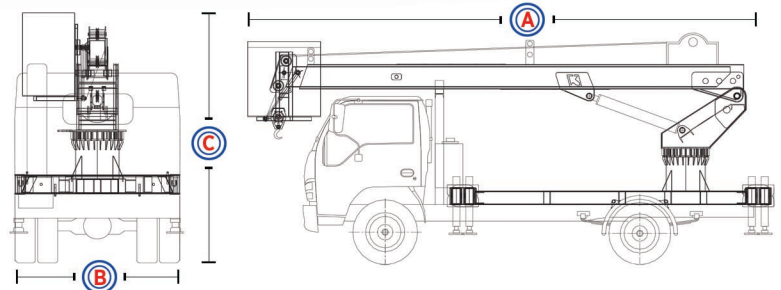

| Technical Data       | PTV<br>162.3000  |
|----------------------|------------------|
| Operating Height     | 16 m             |
| Platform Height      | 14 m             |
| Lateral Outreach     | 11 m             |
| Turret Rotation      | 360°             |
| Crane Load Capacity  | 3000 kg          |
| Basket Capacity (kg) | 200 kg           |
| Basket Dimensions    | 750x1000x1100 mm |
| (C) Stowed Height    | 2850 mm          |
| (A) Stowed Length    | 9000 mm          |
| (B) Stowed Width     | 2200 mm          |
| Control System       | Hydromechanical  |
| Weight               | 4100 kg          |

