

PTKG3500

TOW TRUCKS

STANDARD FEATURES

Performance


- Lighting
- Engine Start/Stop System on Base Control Panel (vehicle dependent)
- Rotating Beacon on Turret
- All-terrain Outrigger Swivels
- Non-slip Body
- Toolbox (2 pieces)
- Flashing Beacon with Paging
- Control Panels on Both Sides of Truck

Safety

- TS-EN 280 + A1 / CE Conformity
- Emergency Stop Buttons on Control Panels
- Pressure Holding Valves and Interlocking Valves against hose blasts
- High Pressure Relief Valve
- Emergency Descend Hand Pump

OPTIONAL FEATURES

- Electronic Load Scaling
- Automatic One-button Platform Leveling
- Continuous Turret Rotation
- External AC Powerpack
- Electronic Card Controlled Proportional Joystick System
- Towing Apparatus (+1 Vehicle Towing Capacity)
- Custom Paint Color
- Additional Lighting

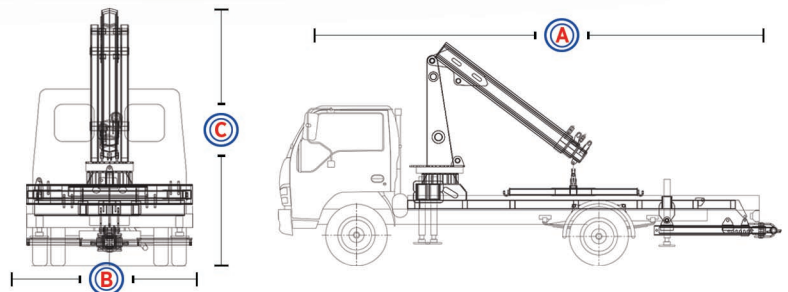

Technical Data	PTKG 3500
Operating Height	8,5 m
Lateral Outreach	6,5 m
Turret Rotation	270°
Crane Load Capacity	3500 kg
(C) Stowed Height	3100 mm
(A) Stowed Length	5600 mm
(B) Stowed Width	2200 mm
Width Outriggers Extended	5000 mm
Control System	Hydromechanical
Weight	2950 kg
Vehicle Segment	GVW 7,5 t

