

PTY254F

SELF PROPELLED DIESEL TELESCOPIC PLATFORMS

STANDARD FEATURES

Performance


- Deutz (or equivalent) Diesel Engine
- Fly Boom
- Easy Onboard Calibration®
- Simultaneous Commands Execution (Full proportional)
- 350° Turret Rotation
- Drive at height
- Drive speed proportional to height
- Speed / Torque Drive Selection
- Hydromotors with brake
- Drive Traction Control System
- 30% Gradability
- Proportional Joystick Controller
- Digital Control Panel (
- Platform Controls on Base
- Aluminium Basket
- Heavy Duty Solid Rubber Tires
- Orange - White Paint
- Hour Meter
- Basket Lighting
- Horn
- Rotating Beacon

Safety

- TS-EN 280 + A1 / CE Conformity
- Emergency Bypass® System
- Emergency Stop Buttons on Control Panels
- Pressure Holding and Interlocking Valves against Hose Blasts
- High Pressure Relief Valve
- Emergency Descend Hand Pump
- Descend Buzzer

OPTIONAL FEATURES

- Fly Rotation (180° Horizontal)
- Basket Rotation
- Basket Load Cell
- Extra Basket Capacity
- Steel Basket
- 70000V Insulated Fiberglass Basket
- 110V / 220V / 380V Socket in Basket
- Air Outlet on Basket
- Anemometer in Basket
- Basket Toolbox
- Continuous Turret Rotation
- Wireless Remote Controller
- Custom Paint Color
- Additional Lighting

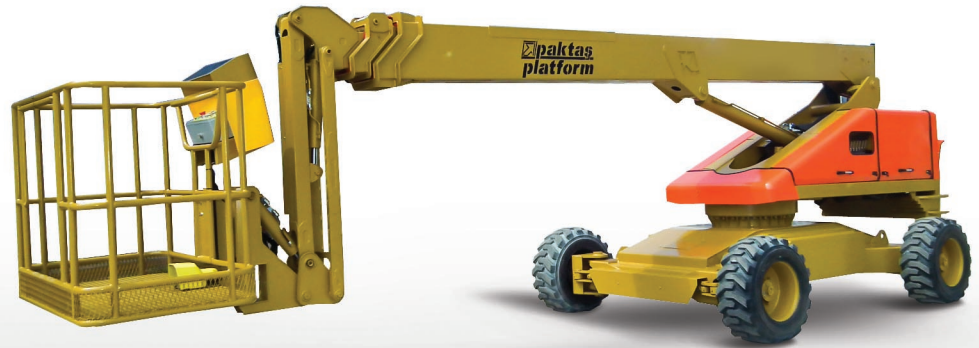

Technical Data

PTY
254F

Operating Height	25 m
Platform Height	23 m
Lateral Outreach	15 m
Turret Rotation	350°
Basket Capacity (kg / person)	250 kg
Basket Dimensions	800x1600x1100 mm
Ⓐ Stowed Height	2800 mm
Ⓑ Stowed Length	8250 mm
Ⓒ Stowed Width	2400 mm
Control System	Electronic Proportional Joystick
Weight	14000 kg
Drive System	Hydromotor (4x4)

