

# PTV142.2000

TELESCOPIC CRANE PLATFORMS

## STANDARD FEATURES

### Performance


- 70000V Insulated Fiberglass Basket
- Automatic Basket Leveling
- Lighting on Basket
- Engine Start/Stop System (Vehicle dependent)
- Basket and Turret Control Panels
- Rotating Beacon on Turret
- All-terrain Outrigger Swivels
- Non-slip Body
- Toolbox (2 pieces)

### Safety

- TS-EN 280 + A1 / CE Conformity
- Emergency Bypass® System
- Emergency Stop Buttons on Control Panels
- Pressure Holding Valves and Interlocking Valves against hose blasts
- High Pressure Relief Valve
- Emergency Descend Hand Pump

## OPTIONAL FEATURES

- Electronic Card Controlled Proportional Joystick Controller
- Controller
- Simultaneous Commands Execution (Full proportional)
- Electronic Load Scaling
- Automatic One-button Platform Leveling
- Tilt Sensor
- External AC Powerpack
- 110V/220V/380V Socket in Basket
- Aluminium Basket
- Steel Basket
- Extra Basket Capacity
- Toolbox in Basket
- Wireless Remote Joystick Controller
- Continuous Turret Rotation
- Operator Seat
- Operator Cabin
- Nonslip Aluminium Body
- Additional Toolboxes (+2)
- Additional Lighting

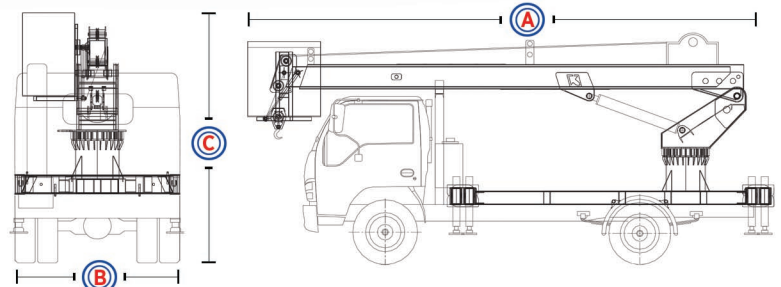

Technical Data	PTV 142.2000
Operating Height	14 m
Platform Height	12 m
Lateral Outreach	10 m
Turret Rotation	360°
Crane Load Capacity	2000 kg
Basket Capacity (kg)	200 kg
Basket Dimensions	750x1000x1100 mm
(C) Stowed Height	2750 mm
(A) Stowed Length	8000 mm
(B) Stowed Width	2200 mm
Control System	Hydromechanical
Weight	3250 kg

