

PTV142.5000

TELESCOPIC CRANE PLATFORMS

STANDARD FEATURES

Performance


- 70000V Insulated Fiberglass Basket
- Automatic Basket Leveling
- Lighting on Basket
- Engine Start/Stop System (Vehicle dependent)
- Basket and Turret Control Panels
- Rotating Beacon on Turret
- All-terrain Outrigger Swivels
- Non-slip Body
- Toolbox (2 pieces)

Safety

- TS-EN 280 + A1 / CE Conformity
- Emergency Bypass® System
- Emergency Stop Buttons on Control Panels
- Pressure Holding Valves and Interlocking Valves against hose blasts
- High Pressure Relief Valve
- Emergency Descend Hand Pump

OPTIONAL FEATURES

- Electronic Card Controlled Proportional Joystick Controller
- Simultaneous Commands Execution (Full proportional)
- Electronic Load Scaling
- Automatic One-button Platform Leveling
- Tilt Sensor
- External AC Powerpack
- 110V/220V/380V Socket in Basket
- Aluminium Basket
- Steel Basket
- Extra Basket Capacity
- Toolbox in Basket
- Wireless Remote Joystick Controller
- Continuous Turret Rotation
- Operator Seat
- Operator Cabin
- Nonslip Aluminium Body
- Additional Toolboxes (+2)
- Additional Lighting

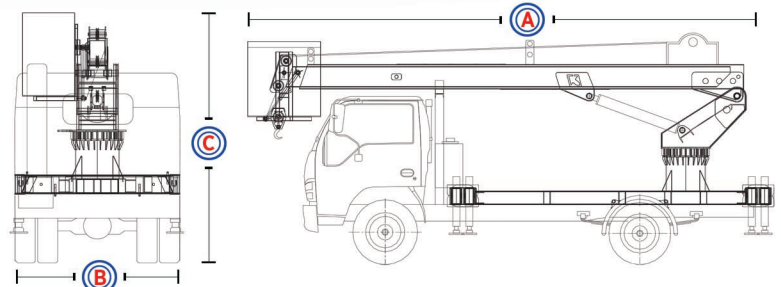

Technical Data

PTV
142.5000

Operating Height	14 m
Platform Height	12 m
Lateral Outreach	10 m
Turret Rotation	360°
Crane Load Capacity	5000 kg
Basket Capacity (kg)	200 kg
Basket Dimensions	750x1000x1100 mm
Ⓒ Stowed Height	2750 mm
Ⓐ Stowed Length	8000 mm
Ⓑ Stowed Width	2200 mm
Control System	Hydromechanical
Weight	3750 kg

